


RED LIGHTING

TYPE A

AC 70/7460-1K Painted Tower/Red Lights for Night

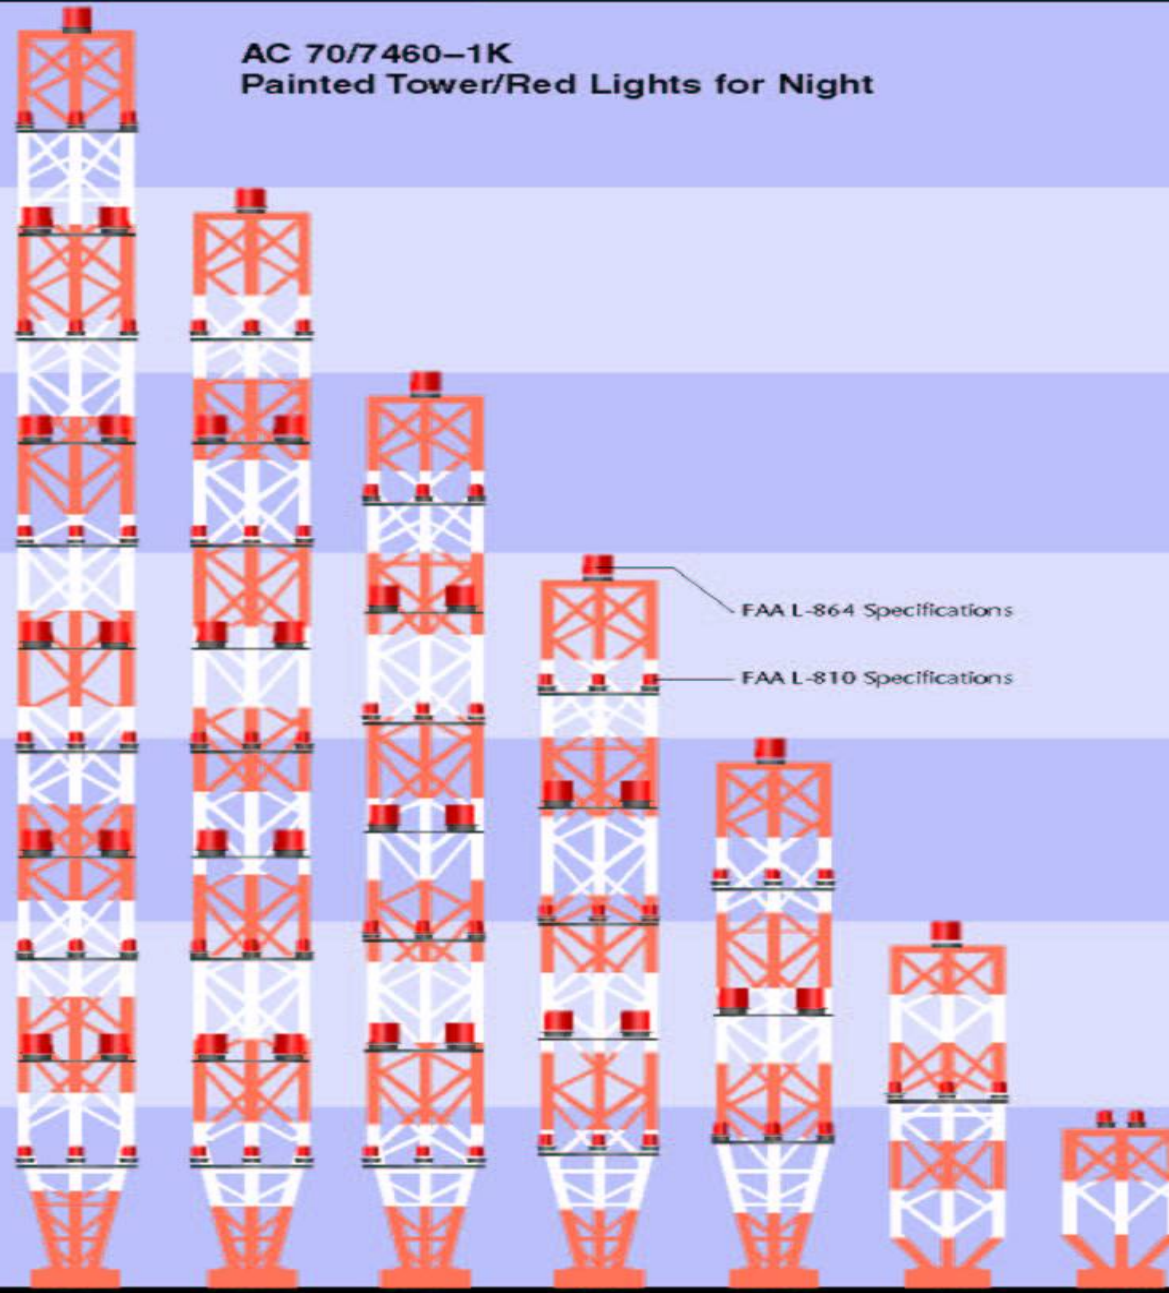

A-6
Over 1750' but not more than 2200'
(including any appurtenance)
(1) L-864 Red Beacons
(18) L-810 Marker Lights
(Marker Light Kits available)

A-5
Over 1400' but not more than 1750'
(including any appurtenance)
(9) L-864 Red Beacons
(15) L-810 Marker Lights

A-4
Over 1050' but not more than 1400'
(including any appurtenance)
(7) L-864 Red Beacons
(12) L-810 Marker Lights

FAA L-864 Specifications

FAA L-810 Specifications


A-3
Over 700' but not more than 1050'
(including any appurtenance)
(5) L-864 Red Beacons
(9) L-810 Marker Lights
(12) If square tower

A-2
Over 350' but not more than 700'
(including any appurtenance)
(3) L-864 Red Beacons
(6) L-810 Marker Lights
(8) If square tower

A-1
150' but not more than 350'
(including any appurtenance)
(1) L-864 Red Beacon
(2) or (3) L-810 Marker Lights
(4) If square tower

A-0
Less than 150'
(including any appurtenance)
(1) OL-2 double obstruction
(2) L-810 Marker Lights
Steady burn

AC 70/7460-1K White Lights for Day/White Lights for Night

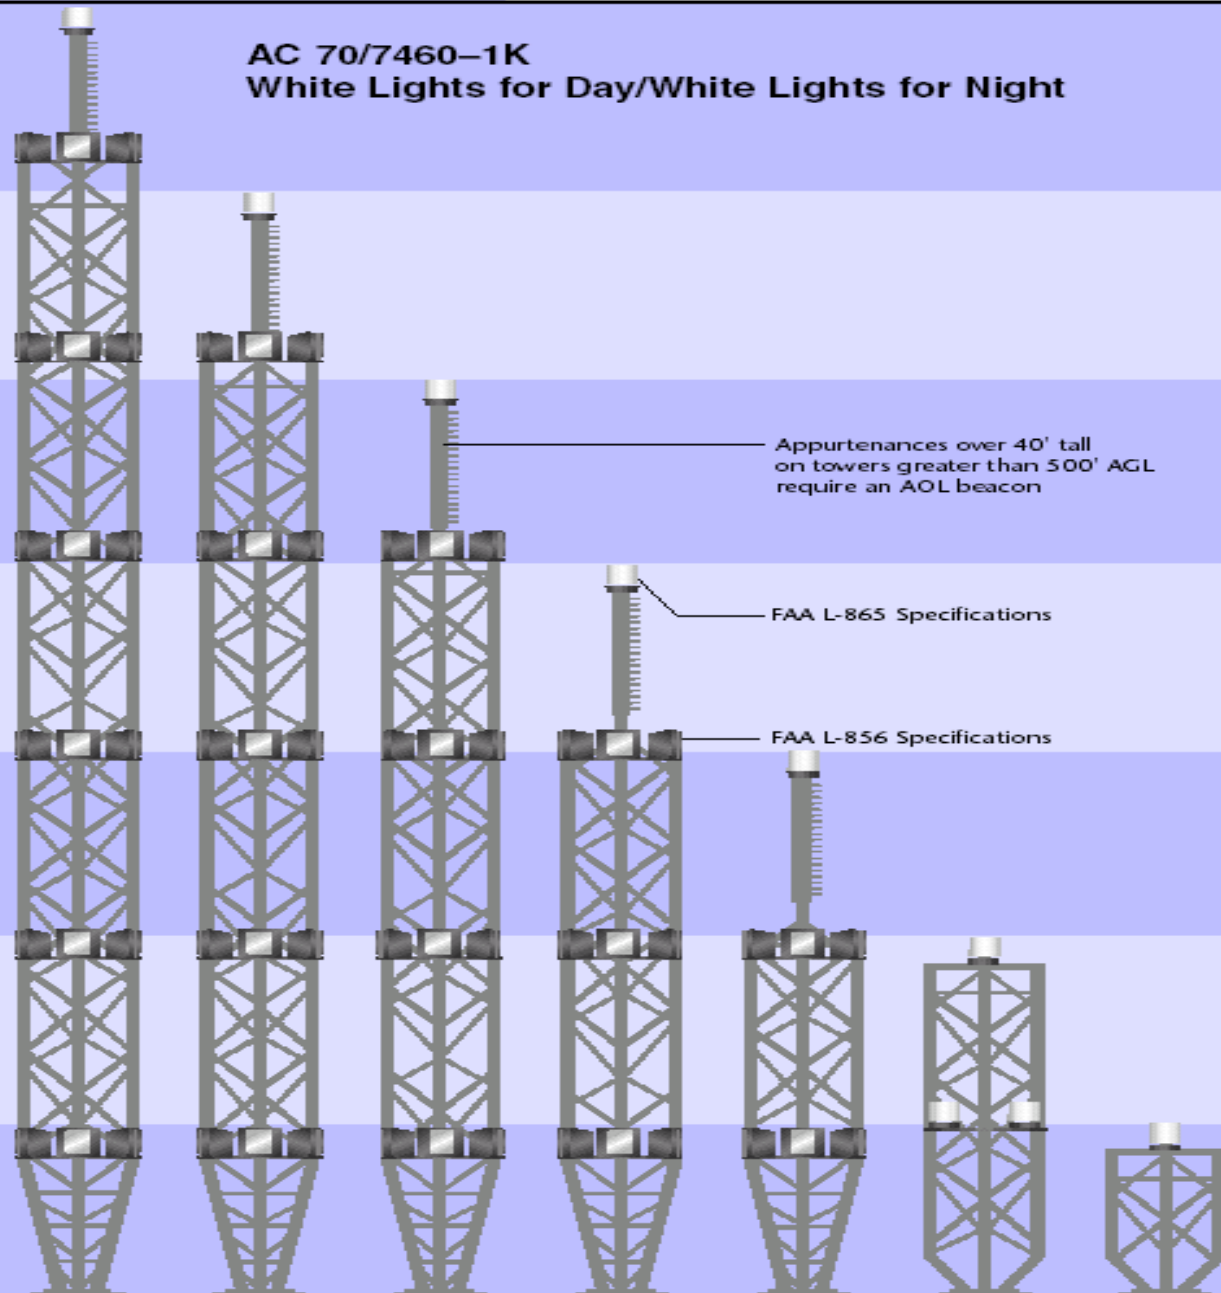

C-6
Over 1750' but not more than 2200'
(Excluding appurtenance)
(1) L-865 AOL Beacon
(18) L-856 High Intensity Beacons

C-5
Over 1400' but not more than 1750'
(Excluding appurtenance)
(1) L-865 AOL Beacon
(15) L-856 High Intensity Beacons

C-4
Over 1050' but not more than 1400'
(Excluding appurtenance)
(1) L-865 AOL Beacon
(12) L-856 High Intensity Beacons


C-3
Over 700' but not more than 1050'
(Excluding appurtenance)
(1) L-865 AOL Beacon
(9) L-856 High Intensity Beacons

C-2
Over 500' but not more than 700'
(Excluding appurtenance)
(1) L-865 AOL Beacon
(6) L-856 High Intensity Beacons

D-2
Over 350' but not more than 500'
(Including any appurtenance)
(3) L-865 Medium Intensity Beacons

D-1
200' but not more than 350'
(Including any appurtenance)
(1) L-865 Medium Intensity Beacon

AC 70/7460-1K White Lights for Day/Red Lights for Night

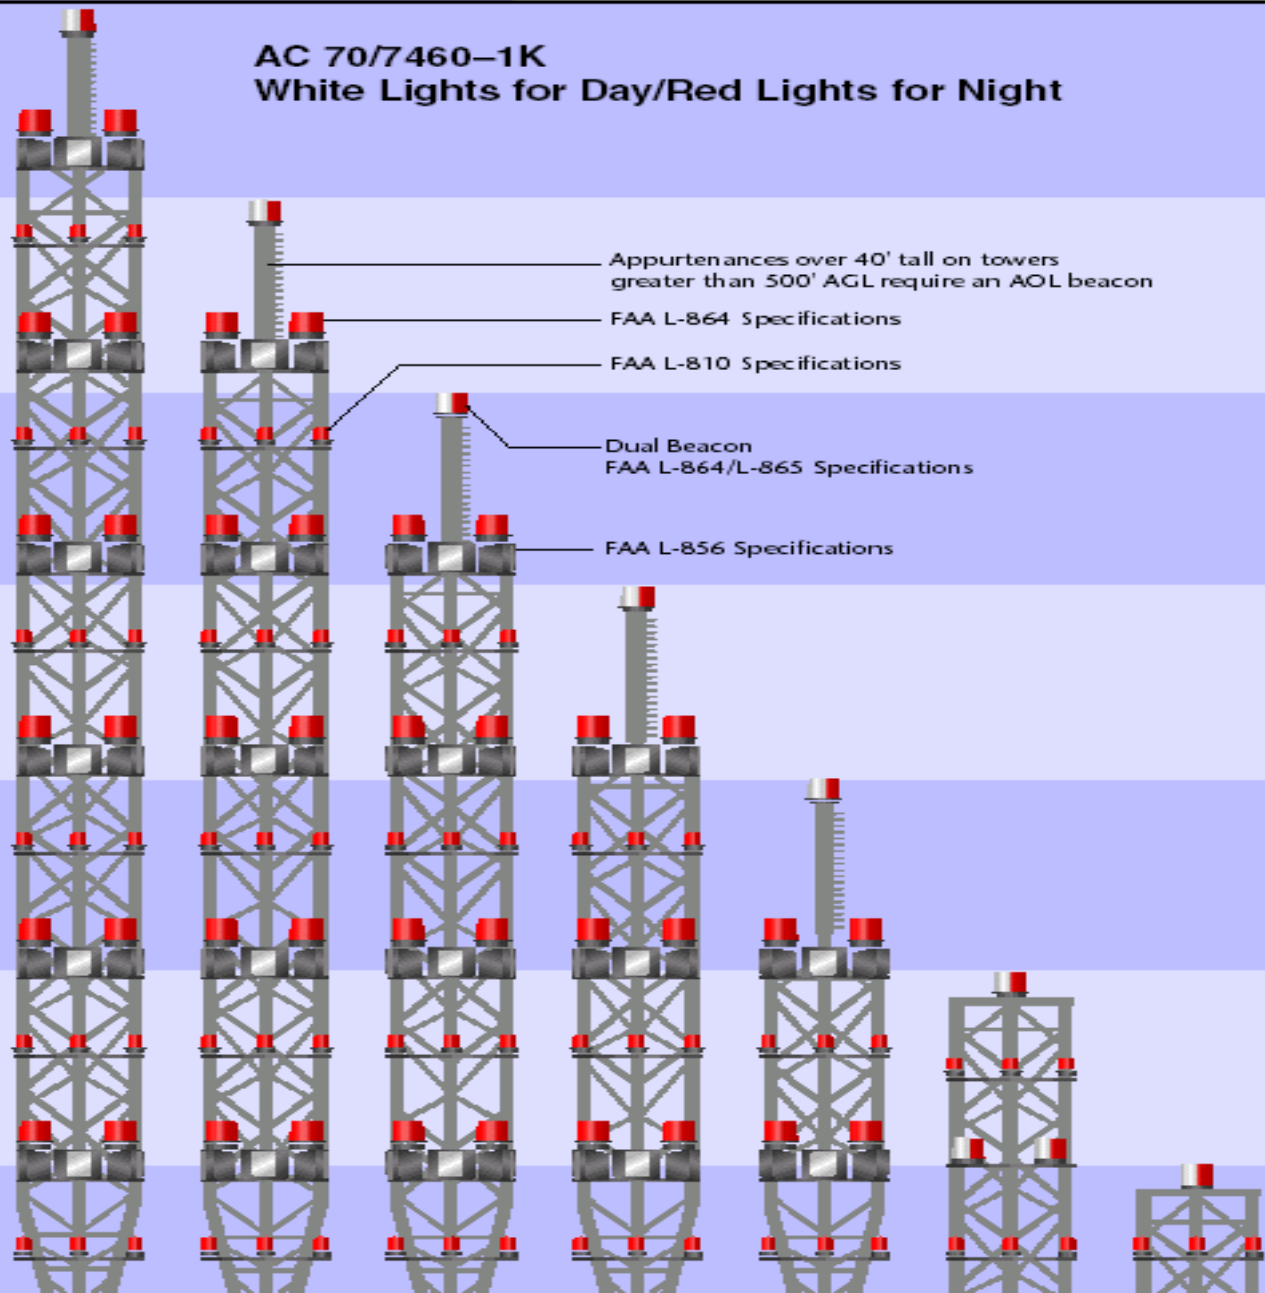

F-6
Over 1750' but not more than 2200'
(Excluding appurtenance)
(1) L-864/L-865 Dual Beacon
(12) L-864 Red Beacons
(18) L-856 High Intensity Beacons
(18) L-810 Marker Lights

F-5
Over 1400' but not more than 1750'
(Excluding appurtenance)
(1) L-864/L-865 Dual Beacon
(10) L-864 Red Beacons
(15) L-856 High Intensity Beacons
(15) L-810 Marker Lights

F-4
Over 1050' but not more than 1400'
(Excluding appurtenance)
(1) L-864/L-865 Dual Beacon
(8) L-864 Red Beacons
(12) L-856 High Intensity Beacons
(12) L-810 Marker Lights

F-3
Over 700' but not more than 1050'
(Excluding appurtenance)
(1) L-864/L-865 Dual Beacon
(6) L-864 Red Beacons
(9) L-856 High Intensity Beacons
(9) L-810 Marker Lights
(12) if square tower

F-2
Over 500' but not more than 700'
(Excluding appurtenance)
(1) L-864/L-865 Dual Beacon
(4) L-864 Red Beacons
(6) L-856 High Intensity Beacons
(6) L-810 Marker Lights
(8) if square tower

E-2
Over 350' but not more than 500'
(Including any appurtenance)
(3) L-864/L-865 Dual Beacons
(6) L-810 Marker Lights
(8) if square tower

E-1
200' but not more than 350'
(Including any appurtenance)
(1) L-864/L-865 Dual Beacon
(2) or (3) L-810 Marker Lights