

LF4MAX SERIES Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LF4MAX-LG-75-150W-MCTPB-KN-P
LF4MAX-LG-75-150W-MCTPB-KN-P-BK
LF4MAX-LG-75-150W-MCTPB-KN-P-WH

MAXIMUM-FEATURE ROUND-BACK FLOOD LIGHT WITH U BRACKET


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

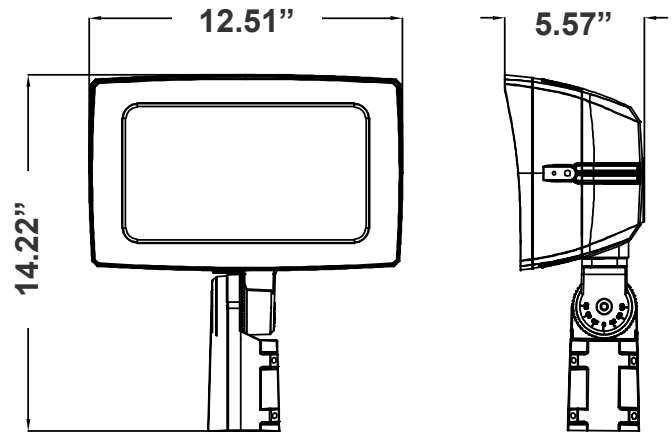

12.51"(W) x 14.22"(H) x 5.57"(D)

Round-back floodlight with U-bracket offering full control of beam angle, CCT, wattage, and photocell. Model MTP4 arriving this season.

Features

- 90° Adjustable 1/2" Knuckle Mount
- 7-Year Warranty
- Multi-CCT & Multi-Power - The Switches are on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 75W/100W/150W
- Power Factor: >0.9
- Efficacy: 140LPW

Mechanical:

- Housing: Die-cast Aluminum Housing with Powder Coat Finish
- 90° Adjustable 1/2" Knuckle Mount
- Photocell Included (With Disconnect Switch)
- 6KV Lightning Surge Protection
- Cord Type: 6' SJTW 18/3 AWG Cable
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Effective projected areas (EPA's) are:
 - Front = 0.38 square feet
 - Side = 0.30 square feet
 - Face = 1.05 square feet
- IP Rating: IP65
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi-CCT & Multi-Power - The Switches are on the Bottom of the Fixture
- Total Lumens: 21000LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 70
- Adjustable Beam Angle: 135°x125°/120°x120°/90°x90°
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-01072025

Photometrics: LEMAX-LG-75-150 W-MCTPB-P



BUG Rating: B4-U0-G1

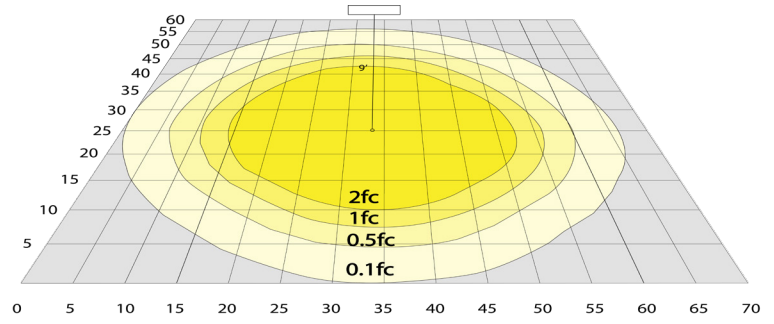

Other Views:

Bronze:



Side View



Front View



Back View

Black:



Side View



Front View



Back View

White:



Side View



Front View



Back View

Performance Table: LEMAX-LG-75-150 W-MCTPB-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LEMAX-LG-75-150W-MCTPB-P	75W	120~277V	10500LM	3000K	B4-U0-G1	140
LEMAX-LG-75-150W-MCTPB-P-BK	100W		14000LM	4000K		
LEMAX-LG-75-150W-MCTPB-P-WH	150W		21000LM	5000K		

Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color	Temp.Basket	Photocell	Finishes							
LF4MAX	-	MD	-	75	-	150W	-	MCTPB	-	KN	-	P	-	
Blank = Bronze BK = Black WH = White														

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

