




SLATERCOM- WCD / DIALIGHT DIRW SERIES LIGHTING CONTROLLER

DESIGNED SPECIFICALLY FOR DIALIGHT DUAL RED-WHITE LED LIGHTING SYSTEMS

- AVAILABLE IN ANY AC OR 48VDC VERSIONS
- FAA D and E MODELS AVAILABLE
- ISOLATED REGULATED POWER SUPPLY
- INTEGRATED MARKER LIGHT CONTROLS
- SEPARATE ALARM TERMINAL STRIPS
- LED'S INDICATE "NORMAL" & "ALARM"
- ALL INPUTS & OUTPUTS FULLY PROTECTED
- LED'S ON FUSE HOLDERS SHOW OPEN FUSES
- EASILY SERVICED MODULAR CONSTRUCTION
- NEMA 4 ENCLOSURES- STEEL OR SS
- STANDARD ENCLOSURE-16" w X20"h X6"d
- SHIPPING WEIGHT- 40 LBS OR LESS
- MANUAL PEC OVERRIDE PROVIDED
- ALARM RELAYS CONFIGURABLE AS NO OR NC
- OPERABLE OVER FAA SPECIFIED - 55C TO +55C TEMPERATURE RANGE
- SYSTEM SCHEMATIC, ID & WARNING LABELS LOCATED INSIDE DOOR
- ALL I/O CONNECTIONS PROTECTED TO FAA AC150/5345-43E SPECIFICATIONS
- FIVE YEAR WARRANTY
- CUSTOM CONFIGURATIONS READILY AVAILABLE
- E-2 SYSTEMS AVAILABLE PRE-WIRED IN SINGLE ENCLOSURE



FAA E-1 MODEL

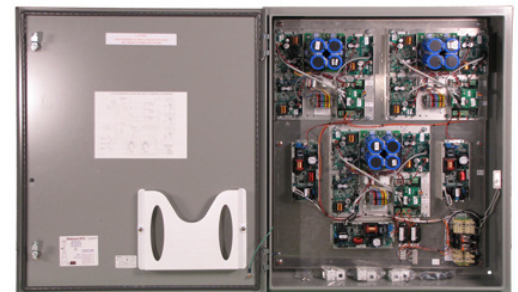

FAA E-2 MODEL